

Explore More Printing Possibilities



FACTORY

+86 188 0539 2014
sophia@uvprinterbest.com
www.uvprinterbest.com

A13a, Dingcheng Industrial Park,
Linyi city, Shandong Province, China

DEALERS

Digital Inkjet Printing Machinery



Precision

Stability

Efficiency

CE SGS Verified Manufacturer
欧盟权威认证生产企业

COMPANY PROFILE

About YDM

Established in 2005, Linyi Yicai Digital Machinery Co., Ltd. (hereafter as YDM) is a professional manufacturer of digital printing machinery in China, officially verified by CE/ SGS certificate. In last 15 years, YDM has been committed to the improvement of machine performance and service ability in terminal market, that enable us to be a top ranking factory in this field.

Product Range :

- ▲ UV Flatbed printer
- ▲ UV Roll to roll printer
- ▲ Eco-Solvent Inkjet printer
- ▲ CNC Router
- ▲ Consumables

Sub Brands

YICAI — is a company namesake brand, specialized in china domestic market. In order to provide better service for oversea clients, we have established YDM, FOCUS sub brands and already exported to USA, FRANCE, RUSSIA, INDIA...etc more than 50 countries, and our brand image much improved.

Honor & Certificate

- CE/ SGS/ BV certificate
- Vice president of SSIA
- New dynamic Bench-marking enterprise
- E-commerce outstanding service provider

Vision

YDM has helped more than 3,000 customers worldwide engaged in digital printing industry and realize their dreams to establish own business. We hope every customer will enjoy best printing experience and have utmost benefit from our machinery.



CONTENTS

5
6
7
8
9
10
11

13
14

15
16
17

UV Flatbed printer

A4
UV6090
UV1313
UV2513-E
UV2513-B
UV2513-G
UV2030

UV Roll to roll Inkjet printer

F3200
YC3200

Eco-Solvent Inkjet printer

1600 1800 3200

CNC Router

1325-R

Printing Application

UV FLATBED PRINTER



· 益彩 6090 UV 平板打印机 / A1 Size 9060 UV Printer

刷新速度 绘出未来

Transcending the Speed Printing the Future



行业应用

Industry Application



礼盒
Gift Box



大理石
Marble



亚克力
Acrylic backlit



背景墙
Wallpanels



玻璃等
Glass Splashbacks



· 益彩



机器参数

Machine Parameters

机型 / Model	YDM UV9060打印机 / YDM 9060 UV FLATBED PRINTER
喷头 / Printhead	XP600/DX7/DX5/i3200/Toshiba/Ricoh G5i Print Head
喷头数量 / Print Head Number	2~4 ph
打印模式 / Print Mode	CMYK/CMYK+W/CMYK+CMYK/CMYK+W+V
打印尺寸 / Print Width	900mm x 600mm
打印速度 / Print Speed	草图4PASS 7 sqm/h
(sqm/h)	标准6PASS 3~5 sqm/h
	高精8PASS 2 sqm/h
打印分辨率 / Print Resolution	4 PASS : 720 x 720 DPI ; 6 PASS : 720 x 1080 DPI ; 8 PASS : 720*1440 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm/ Max. 100 mm; customized height 400 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	RIPrint/Photoprint
数据传送接D/Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	1 KW
机器尺寸/净重 Machine Size/N.W	1.72 m x 1.75 m x 0.85 m, 280kgs
包装尺寸/毛重 Packing Size/G.W	1.8 m x 1.8 m x 1 m,360kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度:40% - 60%
	Seperated, clean, low dust, well-ventilated environment
	Woring Temperature:20°C-28°C
	Relative humidity:40%-60%

Contact:Mrs.Sophia

Whatsapp/Wechat:+86 188 0539 2014

www.uvprinterbest.com

YDM D1250 导带视觉一体机 / D1250 Belt AI UV Printer

机器简介

Machine Instruction

- 视觉定位系统 自动识别打印介质外形与位置，匹配所需打印的图案
Visual Position System Automatically recognize itmes' shape&position and match pictures
- 磁悬浮系统 选配磁悬浮，满足客户对高速高效打印的需求
Maglev System Maglev system optional for customers' requirements to much higher efficient printing
- 自动放料系统 选配自动放料系统，节省人工成本，全程智能化打印
Feeding System Automatic Feeding system optional,save labor cost, intelligent printing



行业应用

Industry Application



Contact: Mrs.Sophia

Whatsapp/Wechat:+86 18805392014

YDM D1250 导带视觉一体机 / D1250 Belt AI UV Printer

机器参数

Machine Parameters

机型 / Model	YDM D1250导带视觉一体机 / YDM D1250 Belt AI UV Printer
喷头/Printhead	爱普生/理光/东芝/精工/EPSON/RICOH/TOSHIBA/SEIKO
数量 / Quantity	2~8ph
磁悬浮/Maglev System	支持/Available
打印尺寸 / Print Width	1250mm
视觉定位系统 支持/Available	YES
/ Visual Position 自动识别/Scanning	YES
System 高度/Max Height	10cm
介质类型 / Media Type	PVC板/雪弗板/金属/玻璃/亚克力/木材等 PVC board, KT board,Metal, Glass,Acrylic,Wood etc.
固化方式/ Curing Method	LED灯紫外线固化/LED ultraviolet curing
机器尺寸/净重 Machine Size/N.W	3.35m x 2.2 m x 1.35 m,800kgs
包装尺寸/毛重 Packing Size/G.W	3.5 m x2.3 m x 1.6m, 950kgs
输入电源 / Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	2.6 KW
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20℃- 30℃,相对湿度:40% - 60% Seperated, clean, low dust, well-ventilated environment Woring Temperature:20℃-30℃ Relative humidity:40%-60%

导购指南/Buying Guide

- 高效率批量生产/Batch production
- 机器自动化,人工成本低/Automatic grade machine,Less labor costs
- 适合形状各异的小件加工/Suitable for the small items with various shapes
- 机器稳定, 源头工厂质保/Quality machine body,Real factory professional service

Email:sophia@uvprinterbest.com

Web:www.ydmuvprinter.com

机器简介

Machine Instruction

- ◆ 爱普生/理光/东芝喷头可选
Epson/Ricoh/Toshiba heads optional

◆ 高精度自动测高系统
Automatic height detection system

◆ 灵敏的小车防撞系统
Anti-collision system
- ◆ 智能恒温墨路系统
Intelligent constant temperature ink system

◆ 采用LED冷温固化技术，更长使用寿命,更低能耗
LED UV water cooling system,higher performancejower energy consumption

◆ 智能墨水液位报警提示系统
Intelligent ink level alarm system




行业应用

Industry Application




Gift Box



Marble



Acrylic Gift



Advertising Signs



Wall Arts

机器参数

Machine Parameters

机型/ Model	UV1313工业级打印机 /1313 UV FLATBED PRINTER
喷头/ Printhead	Epson heads/Toshiba heads/Ricoh heads Available
喷头数量/ Print Head Number	Depends on the heads brand
打印模式/ Print Mode	4C/6C/4C+W/6C+W/4C+W+V
打印尺寸/ Print Width	1300mm x 1300mm/4*4ft
打印速度 / Print Speed (sqm/h)	草图4PASS 10 sqm/h 标准6PASS 7 sqm/h 高精8PASS 5 sqm/h
打印分辨率/ Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式/ File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Riprint/Unitedfancy/Printfactory/Photoprint
数据传送接口/Data Connector	USB3.0
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗/ Power Consumption	3.0 KW
机器尺寸/净重 Machine Size/N.W	2.56 m x 1.95 m x 1.3 m, 660kgs
包装尺寸/毛重 Packing Size/G.W	2.8m x 2.1 m x 1.5 m, 860kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20℃- 28℃,相对湿度:40% - 60% Woring Temperature:20℃-28℃ Relative humidity:40%-60%

工业级1316UV 平板打印机 / Industrial Grade 1316 UV Printer

机器简介

Machine Instruction

- ◆ 爱普生/理光/东芝喷头可选
Epson/Ricoh/Toshiba heads optional
- ◆ 高精度自动测高系统
Automatic height detection system
- ◆ 灵敏的小车防撞系统
Anti-collision system
- ◆ 智能恒温墨路系统
Intelligent constant temperature ink system
- ◆ 采用LED冷温固化技术，更长使用寿命,更低能耗
LED UV water cooling system,higher performance lower energy consumption
- ◆ 智能墨水液位报警提示系统
Intelligent ink level alarm system




行业应用

Industry Application




Gift Box



Marble



Acrylic Gift



Advertising Signs



Wall Arts

高端打印,即刻出发 / High-end Printing;Start with Us

机器参数

Machine Parameters

机型 / Model	UV1316工业级打印机 /1316 UV FLATBED PRINTER
喷头 / Printhead	Epson heads/Toshiba heads/Ricoh heads Available
喷头数量 / Print Head Number	Depends on the heads brand
打印模式 / Print Mode	4C/6C/4C+W/6C+W/4C+W+V
打印尺寸 / Print Width	1300mm x 1300mm/4*4ft
打印速度 / Print Speed	草图4PASS 10 sqm/h 标准6PASS 7 sqm/h (sqm/h)i3200 高精8PASS 5 sqm/h
打印分辨率 / Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm: 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Riprint/Unitedfancy/Printfactory/Photoprint
数据传送连接D/Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	3.0 KW
机器尺寸/净重 Machine Size/N.W	2.7 m x 2.2 m x 1.5 m, 900kgs
包装尺寸/毛重 Packing Size/G.W	2.9m x 2.3 m x 1.65 m, 1000kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度:40% - 60% Working Temperature:20°C-28°C Relative humidity:40%-60%

机器简介

Machine Instruction

◆ 理光G5/东芝/爱普生i3200喷头
Ricoh G5/Toshiba/Epson i3200 heads

◆ 高精度自动测高系统
Automatic height detection system

◆ 6区真空吸附平台
6 Parts vacuum suction platform

◆ 智能恒温墨路系统
Intelligent constant temperature ink system

◆ 采用LED冷温固化技术，更长使用寿命,更低能耗
LED UV water cooling system,higher performance lower energy consumption

◆ 智能墨水液位报警提示系统
Intelligent ink level alarm system




行业应用

Industry Application



Gift Box



Marble



Acrylic backlit



Wallpanels



Glass Splashbacks

机器参数

Machine Parameters

机型 / Model	UV2513E经济型打印机 /2513E UV PRINTER
喷头 / Printhead	Ricoh G5i/Toshiba/Epson i3200 heads optiona
喷头数量 / Print Head Number	Max 4 heads
打印模式 / Print Mode	CMYK/CMYK+W/CMYK+W+V/CMYK+CMYK
打印尺寸 / Print Width	2500mm x 1300mm/8*4ft
打印速度 / Print Speed	草图4PASS 10 sqm/h 标准6PASS 7 sqm/h 高精8PASS 5 sqm/h
打印方向 / Print Direction	单向/双向打印 Unidirection/Bidirection
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Riprint/Unitedfancy
数据传送接口/Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	3.5 KW
机器尺寸/净重 Machine Size/N.W	3.7 m x 2.1 m x 1.25 m, 800kgs
包装尺寸/毛重 Packing Size/G.W	3.9 m x 2.3 m x 1.45 m, 1000kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20℃- 28℃,相对湿度:40% - 60% Woring Temperature:20℃-28℃ Relative humidity:40%-60%



机器简介

Machine Instruction

- 配置理光G 5喷头
Ricoh Gen5 Print Head
- 高精度自动测高系统
Automatic height detection system
- 灵敏的小车防撞系统
Anti-collision system
- 智能恒温墨路系统
Intelligent constant temperature ink system
- 采用LED冷温固化技术, 更长使用寿命, 更低能耗
LED UV water cooling system, higher performance, lower energy consumption
- 智能墨水液位报警提示系统
Intelligent ink level alarm system



行业应用

Industry Application



Gift Box Marble Acrylic backlit Wallpanels Glass Splashbacks

机器参数

Machine Parameters

机型 / Model	UV2513B工业级打印机 / 2513B UV FLATBED PRINTER
喷头 / Printhead	Ricoh GEN5/GEN6 Industrial Grayscale Print Head
喷头数量 / Print Head Number	2~8ph
打印模式 / Print Mode	4C/6C/4C+W/6C+W/4C+W+V/6C+W+V
打印尺寸 / Print Width	2500mm x 1300mm/8*4ft
打印速度 / Print Speed (sqm/h)	草图4PASS 18sqm/h 标准6PASS 15sqm/h 高精8PASS 12sqm/h
打印分辨率 / Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic, 3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF / JPEG / POSTSCRIPT3 / PDF
RIP软件 / RIP Software	Printfactory/Photoprint
数据传送接口 / Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相, 50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	3.5 KW
机器尺寸 / 净重 Machine Size / N.W	4.6 m x 2 m x 1.45 m, 1200kgs
包装尺寸 / 毛重 Packing Size / G.W	4.7 m x 2.3 m x 1.65 m, 1600kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度: 20°C- 28°C, 相对湿度: 40% - 60% Working Temperature: 20°C-28°C Relative humidity: 40%-60%

机器简介

Machine Instruction

配置理光G6 喷头
Ricoh Gen6 Print Head

高精度自动测高系统
Automatic height detection system

灵敏的小车防撞系统
Anti-collision system

智能恒温墨路系统
Intelligent constant temperature ink system

采用LED冷温固化技术, 更长使用寿命, 更低能耗
LED UV water cooling system, higher performance, lower energy consumption

高速稳定的磁悬浮系统
Maglev system with high speed



行业应用

Industry Application



Gift Box



Marble



Acrylic backlit



Wallpanels



Glass Splashbacks

Contact: Mrs. Sophia

Whatsapp/Wechat: +86 188 0539 2014

机器参数

Machine Parameters

机型 / Model	YDM UV2513B工业级打印机 / YDM 2513B UV FLATBED PRINTER
喷头 / Printhead	Ricoh GEN6灰度级压电喷头 Ricoh GEN6 Industrial Grayscale Print Head
喷头数量 / Print Head Number	2-8 ph
打印模式 / Print Mode	4C/6C/4C+W/6C+W/4C+W+V/6C+W+V
打印尺寸 / Print Width	2500mm x 1300mm/8*4ft
打印速度 / Print Speed	草图4PASS 37 sqm/h
(sqm/h)	标准6PASS 20 sqm/h
	高精8PASS 15 sqm/h
打印分辨率 / Print Resolution	4 PASS : 726 x 600 DPI ; 6 PASS : 726 x 900 DPI ; 8 PASS : 726*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic, 3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / Ink Type	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Printfactory/Photoprint
数据传送接口 / Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相, 50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	3.5 KW
机器尺寸 / 净重 Machine Size/N.W	4.6 m x 2 m x 1.45 m, 1200kgs
包装尺寸 / 毛重 Packing Size/G.W	4.7 m x 2.3 m x 1.65 m, 1600kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度: 20°C - 28°C, 相对湿度: 40% - 60% Working Temperature: 20°C - 28°C Relative humidity: 40% - 60%

www.uvprinterbest.com

刷新速度 绘出未来

Transcending the Speed Printing the Future



行业应用

Industry Application



礼盒
Gift Box



大理石
Marble



亚克力
Acrylic backlit



背景墙
Wallpanels



玻璃等
Glass Splashbacks

机器参数

Machine Parameters

机型/ Model	YDM UV2513Pro+ 工业级打印机 /YDM 2513Pro+ UV PRINTER	
喷头/ Printhead	Ricoh G5/G6 灰度级压电喷头 SEIKO/Ricoh G5/G6 Industrial Print Head	
喷头数量/ Print Head Number	2~8 ph	
打印模式/ Print Mode	CMYK/CMYK+W/CMYK+CMYK/CMYK+W+V/2CMYK+2W+2V etc.	
打印尺寸/ Print Width	2500mm x 1300mm	
打印速度 / Print Speed (sqm/h)	草图4PASS	18sqm/h
	标准6PASS	15sqm/h
	高精8PASS	12sqm/h
打印分辨率/ Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI	
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.	
介质厚度 Media Thickness	材料厚度≤100mm: 车头升降≤100mm / Max. 100 mm	
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)	
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish	
固化系统 / Curing System	LED灯固化系统 LED Curing System	
输入格式/ File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF	
RIP软件 / RIP Software	Printfactory/Photoprint	
数据传送接口/Data Connector	USB3.0	
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ	
机器功耗/ Power Consumption	3.5 KW	
机器尺寸/净重 Machine Size/N.W	4800 mm x 2000 mm x 1450 mm, 1300kgs	
包装尺寸/毛重 Packing Size/G.W	4900 mm x 2300 mm x 1650 mm ,1700kgs	
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度:40% - 60% Woring Temperature:20°C-28°C Relative humidity:40%-60%	

机器简介

Machine Instruction

配置理光G5喷头
Ricoh Gen5 Print Head


高精度自动测高系统
Automatic height detection system

灵敏的小车防撞系统
Anti-collision system

智能恒温墨路系统
Intelligent constant temperature ink system

采用LED冷温固化技术，更长使用寿命,更低能耗
LED UV water cooling system, higher performance, lower energy consumption

智能墨水液位报警提示系统
Intelligent ink level alarm system

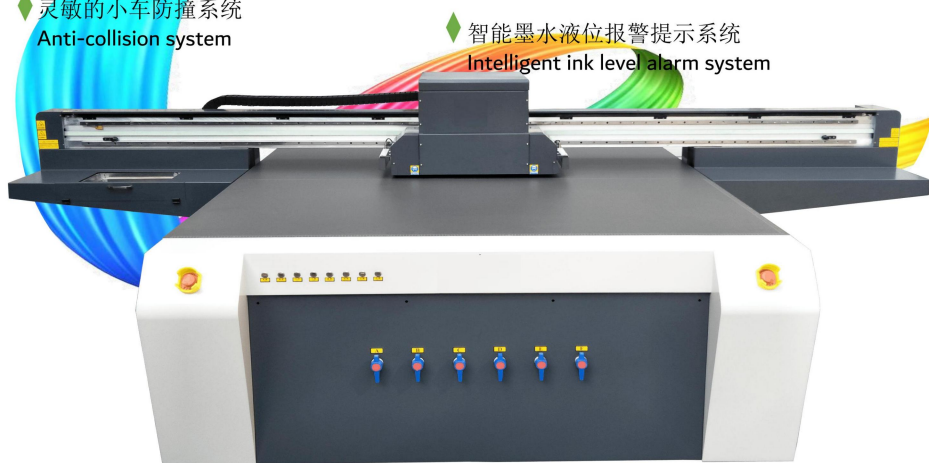

行业应用

Industry Application



Gift Box



Marble



Acrylic backlit



Wallpanels



Glass Splashbacks


机器参数

Machine Parameters

机型 / Model	UV2030工业级打印机 / 2030 UV FLATBED PRINTER
喷头 / Printhead	Ricoh GEN5/GEN6 Industrial Grayscale Print Head
喷头数量 / Print Head Number	2~8ph
打印模式 / Print Mode	4C/6C/4C+W/6C+W/4C+W+V/6C+W+V
打印尺寸 / Print Width	2000mm x 3000mm
打印速度 / Print Speed (sqm/h)	草图4PASS 18sqm/h 标准6PASS 15sqm/h 高精8PASS 12sqm/h
打印分辨率 / Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic, 3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF / JPEG / POSTSCRIPT3 / PDF
RIP软件 / RIP Software	Printfactory/Photoprint
数据传送接口 / Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相, 50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	3.5 KW
机器尺寸 / 净重 Machine Size / N.W	4 m x 3.9 m x 1.45 m, 1600kgs
包装尺寸 / 毛重 Packing Size / G.W	4.2m x 0.8 m x 1 m + 4.1*2*1.4m, 2500kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度: 20°C- 28°C, 相对湿度: 40% - 60% Separated, clean, low dust, well-ventilated environment Working Temperature: 20°C-28°C Relative humidity: 40%-60%

刷新速度 绘出未来

Transcending the Speed Printing the Future

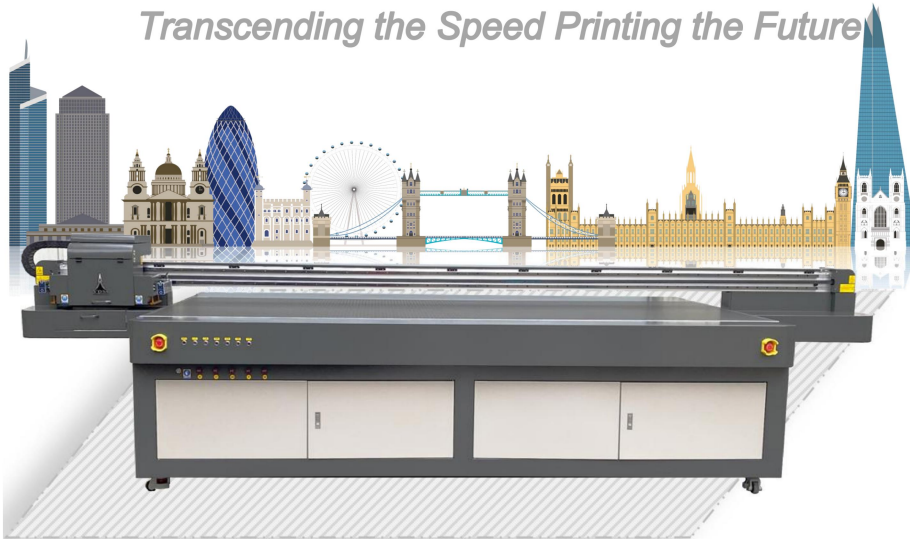

行业应用

Industry Application



礼盒
Gift Box



大理石
Marble



亚克力
Acrylic backlit



背景墙
Wallpanels



玻璃等
Glass Splashbacks

Contact: Mrs. Sophia

Whatsapp/Wechat: +86 188 0539 2014

机器参数

Machine Parameters

机型 / Model	YDM UV3325工业级打印机 / YDM 3325 UV FLATBED PRINTER
喷头 / Printhead	Ricoh GEN6灰度级压电喷头 Ricoh GEN6 Industrial Grayscale Print Head
喷头数量 / Print Head Number	2-8 ph
打印模式 / Print Mode	CMYK/CMYK+W/CMYK+CMYK/CMYK+W+V/2CMYK+2W+2V etc.
打印尺寸 / Print Width	3300mm x 2500mm
打印速度 / Print Speed (sqm/h)	草图4PASS 37sqm/h 标准6PASS 20sqm/h 高精8PASS 15sqm/h
打印分辨率 / Print Resolution	4 PASS : 726x 600 DPI ; 6 PASS : 726 x 900 DPI ; 8 PASS : 726*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic, 3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Printfactory/Photoprint
数据传送接口 / Data Connector	USB3.0
输入电源 / Power	220VAC(±10%)单相, 50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	5 KW
机器尺寸 / 净重 Machine Size / N.W	5.1 m x 3.3 m x 1.45 m, 1500kgs
包装尺寸 / 毛重 Packing Size / G.W	4.6m x 2.1 m x 1.4 m x 2pcs + 3.3m x 2.0m x 1.0m, 2100kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度: 20°C- 28°C, 相对湿度: 40% - 60% Separated, clean, low dust, well-ventilated environment Working Temperature: 20°C-28°C Relative humidity: 40%-60%

www.uvprinterbest.com



机器简介

Machine Instruction

- 配置理光G 5喷头
Ricoh Gen5 Print Head
- 高精度自动测高系统
Automatic height detection system
- 灵敏的小车防撞系统
Anti-collision system
- 智能恒温墨路系统
Intelligent constant temperature ink system
- 采用LED冷温固化技术，更长使用寿命,更低能耗
LED UV water cooling system,higher performancejower energy consumption
- 智能墨水液位报警提示系统
Intelligent ink level alarm system



行业应用

Industry Application



Surfboard



Marble



Acrylic backlit



Wallpanels



Glass Splashbacks

机器参数

Machine Parameters

机型/ Model	UV4030工业级打印机 /4030 UV FLATBED PRINTER		
喷头/ Printhead	Ricoh GEN5/GEN6 Industrial Grayscale Print Head		
喷头数量/ Print Head Number	2~8ph		
打印模式/ Print Mode	CMYK+W+V/CMYK+CMYK+W+W+V+V/CMYK+CMYK+W+W...		
打印尺寸/ Print Width	4000mm x 3000mm		
打印速度 / Print Speed (sqm/h)	草图4PASS	18sqm/h -2heads	36sqm/h -4heads 72sqm/h -8heads
	标准6PASS	15sqm/h -2heads	30sqm/h -4heads 60sqm/h -8heads
	高精8PASS	12sqm/h -2heads	24sqm/h --4heads 48sqm/h -8heads
打印分辨率/ Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI		
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.		
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm		
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)		
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish		
固化系统 / Curing System	LED灯固化系统 LED Curing System		
输入格式/ File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF		
RIP软件 / RIP Software	Printfactory/Photoprint		
数据传送接口/Data Connector	USB3.0		
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ		
机器功耗/ Power Consumption	6.5 KW		
机器尺寸/净重 Machine Size/N.W	8 m x 3.9 m x 1.45 m, 3000kgs		
包装尺寸/毛重 Packing Size/G.W	8.4m x 0.8 m x 1 m+2* 4.1*2*1.4m, 4000kgs		
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度: 40% - 60% Woring Temperature:20°C-28°C Relative humidity:40%-60%		



刷新速度 绘出未来

Transcending the Speed Printing the Future



行业应用

Industry Application



礼盒
Gift Box



大理石
Marble



亚克力
Acrylic backlit



背景墙
Wallpanels



玻璃等
Glass Splashbacks

机器参数

Machine Parameters

机型 / Model	UV3313工业级打印机 / 3313 UV FLATBED PRINTER
喷头 / Printhead	Ricoh G5/G6灰度级压电喷头 Ricoh G5/G6 Industrial Grayscale Print Head
喷头数量 / Print Head Number	2~4 ph
打印模式 / Print Mode	CMYK/CMYK+W/CMYK+CMYK
打印尺寸 / Print Width	3300mm x 1300mm
打印速度 / Print Speed	草图4PASS 18sqm/h 标准6PASS 15sqm/h 高精8PASS 12sqm/h
打印分辨率 / Print Resolution	4 PASS : 720 x 600 DPI ; 6 PASS : 720 x 900 DPI ; 8 PASS : 720*1200 DPI
介质类型 / Media Type	玻璃/亚克力/木板/瓷砖/金属板/PVC板/发泡板/3C产品/皮料等 Glass,Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic,3C product etc.
介质厚度 Media Thickness	材料厚度≤100mm; 车头升降≤100mm / Max. 100 mm
墨水类型 / InkType	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)
特殊墨水 / Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish
固化系统 / Curing System	LED灯固化系统 LED Curing System
输入格式 / File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Printfactory/Photoprint
数据传送接口/Data Connector	USB3.0
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	4.5 KW
机器尺寸/净重 Machine Size/N.W	4.6 m x 2 m x 1.45 m, 1200kgs
包装尺寸/毛重 Packing Size/G.W	4.7m x 2.3 m x 1.65 m, 1600kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20℃- 28℃,相对湿度: 40% - 60% Woring Temperature:20℃-28℃ Relative humidity:40%-60%


ECO-SOLVENT/UV PRINTER

3200E 工业级写真机/ Industrial 3200E Pro Eco Solvent Printer

机器简介

Machine Instruction

- ◆ 爱普生i3200 喷头
Epson i3200-U1 Printhead
- ◆ 正反双向打印
Unidirectional/ Bidirectional printing available
- ◆ 自动收放料系统
Auto release/take up system
- ◆ 专业售后服务, 无忧使用
Professional service, Easy operation
- ◆ OEM 定制服务
OEM service available
- ◆ 智能墨水液位报警提示系统
Intelligent ink level alarm system

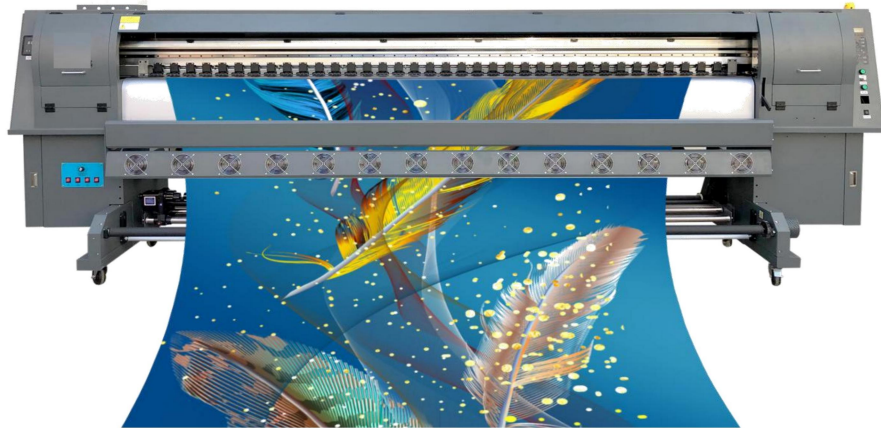

行业应用


Industry Application



Wallpapers



Car Stickers



Advertising Signs



Wall Arts etc.

高端打印,即刻出发 / High-end Printing;Start with YDM

机器参数

Machine Parameters

机型/ Model	3200E 写真机 /3200E Pro Eco solvent/UV Printer
喷头/ Printhead	Epson i3200 /DX5/DX7 heads
喷头数量/ Print Head Number	Max 2heads
打印模式/ Print Mode	CMYK+CMYK/CMYK
打印尺寸/ Print Width	3200MM
打印速度 / Print Speed	草图4PASS 12 sqm/h
(sqm/h)	标准6PASS 10 sqm/h
	高精8PASS 8 sqm/h
打印分辨率/ Print Resolution	4 PASS : 720 x 720DPI ; 6 PASS : 720 x 1080 DPI ; 8 PASS : 720*1440 DPI
介质类型 / Media Type	车贴/反光膜/灯箱布/帆布/皮革等 Coating paper/ PP/ PVC/ banner/Canvas/ Vinyl/ leather,etc
介质厚度 Media Thickness	≤2mm;
墨水类型 / InkType	环保型弱溶剂墨水(不含VOC) Eco solvent Ink (None VOC)
上料方式 / Feeding Type	Pinch roller and vacuum suction platform
收放料系统/ Auto Takeup System	Available
输入格式/ File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Riprint
数据传送接口/Data Connector	LAN
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗/ Power Consumption	3.5 KW
机器尺寸/净重 Machine Size/N.W	4.8 m x 0.9 m x 1.55 m, 750kgs
包装尺寸/毛重 Packing Size/G.W	4.8*1.07*1.67m, 900kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度:40% - 60% Separated, clean, low dust, well-ventilated environment Working Temperature:20°C-28°C Relative humidity:40%-60%

刷新速度 绘出未来
Transcending the Speed Printing the Future




机器细节
Machine Details



稳定工业级伺服电机
Industrial Sevo Motor




德国IGUS耐用拖链
Germany IGUS Drag Chain



超宽打印区域平台
Wide Format Platform



双直线静音导轨
Double Hiwin Mute Linear Rail



防滑毯绒牵引辊
Anti-slide traction Roller



独立负压系统
Nagative Pressure System



车贴
Car Sticker Printing



商业广告
Commercial AD

机器参数
Machine Parameters

机型 / Model	D2000工业级打印机 /D2000 Industry Hybrid Printer
喷头 / Printhead	Epson i3200 /DX5/Ricoh G5 heads optional
喷头数量 / Print Head Number	Max 4 heads
打印模式 / Print Mode	CMYK/CMYK+W/CMYK+W+V etc.
打印尺寸 / Print Width	1800MM
打印速度 / Print Speed	草图4PASS 14-17sqm/h
(sqm/h) G5 heads	标准6PASS 12-15 sqm/h
	高精8PASS 10-12 sqm/h
供墨系统/Ink System	负压供墨/Nagative Pressure Ink Supply System
介质类型 / Media Type	车贴/PP纸/反光贴/喷绘布等其他弱溶剂适用材料 Vinyl/PP materials/reflective sticker/flex banner & others
喷头高度/Printhead Height	可调高度2-8mm Above Media Adjustbale
墨水类型 / InkType	环保型UV墨水 UV Ink
介质传输 / Media Transmit	标准收放料系统 Standard Feeding And Take-up System
墨桶容量/Ink Volume	3500ML/3.5L Volume
输入格式/ File Format	TIFF / JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Riprint/Unitedfancy/Printfactory
数据传送接D/Data Connector	USB3.0/LAN
输入电源 / Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗 / Power Consumption	2.5 KW
机器尺寸/净重 Machine Size/N.W	3.3 m x 1.1 m x 1.6 m, 800kgs
包装尺寸/毛重 Packing Size/G.W	3.6 m x 1.3 m x 1.8m, 1100kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度:40% - 60% Woring Temperature:20°C-28°C Relative humidity:40%-60%

刷新速度 绘出未来

Transcending the Speed Printing the Future



机器细节

Machine Details



稳定工业级伺服电机
Industrial Sevo Motor



德国IGUS耐用拖链
Germany IGUS Drag Chain



超宽打印区域平台
Wide Format Platform



双THK直线静音导轨
Double THK Mute Linear Rail



防滑绒牵引辊
Anti-slide traction Roller



独立负压系统
Negative Pressure System



车贴
Car Sticker Printing



商业广告
Commercial AD

机器参数

Machine Parameters

机型/ Model	FE3200经济型打印机 / FE3200 Eco Solvent Printer
喷头/ Printhead	Epson i3200 / DX5/Ricoh G5 heads optional
喷头数量/ Print Head Number	Max 4 heads
打印模式/ Print Mode	CMYK/CMYK+CMYK/CMYK+CMYK+CMYK/4*CMYK
打印尺寸/ Print Width	3200MM/10ft
打印速度 / Print Speed	草图4PASS 60 sqm/h
(sqm/h) i3200 heads	标准6PASS 40 sqm/h
	高精8PASS 20 sqm/h
供墨系统/Ink System	负压供墨/Negative Pressure Ink Supply System
介质类型 / Media Type	车贴/PP纸/反光贴/喷绘布等其他弱溶剂适用材料 Vinyl/PP materials/reflective sticker/flex banner & others eco solvent ink
喷头高度/Printhead Height	可调高度2-8mm Above Media Adjustbale
墨水类型 / InkType	环保型弱溶剂墨水 Eco Solvent Ink
介质传输 / Media Transmit	标准收放料系统 Standard Feeding And Take-up System
墨桶容量/Ink Volume	3500ML/3.5L Volume
输入格式/ File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
RIP软件 / RIP Software	Riprint/Unitedfancy/Printfactory
数据传送接D/Data Connector	USB3.0/LAN
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗/ Power Consumption	2.5 KW
机器尺寸/净重 Machine Size/N.W	4.75 m x 0.9 m x 1.6 m, 800kgs
包装尺寸/毛重 Packing Size/G.W	5.25 m x 1.12 m x 1.75m, 1100kgs
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 28°C,相对湿度:40% - 60%
	Seperated, clean, low dust, well-ventilated environment Woring Temperature:20°C-28°C Relative humidity:40%-60%

OTHER MACHINES

1300 光油晶片一体机 / 1300 Crystal board Laminator

机器简介

Machine Instruction

- ◆ **双重模式** 光油晶片一体机,轻松切换模式,满足更多客户的不同需求
Dual Control Modes Varnish&Crystal Film all in one machine,Easily mode switch to various need
- ◆ **LED 灯紫外线固化** 任何厚度 密度的板上光油都不会丝毫变形
LED Ultraviolet Curing Keep Vanish shape on boards with different thickness&density
- ◆ **全自动设备** 可自动一次性调节光油厚度 (最厚 20丝) 无需反复过油
Auto Grade Varnish thickness(Max 2mm) adjustment automatically at once,no more process again



行业应用

Industry Application



1300 光油晶片一体机 / 1300 Crystal board Laminator

机器参数

Machine Parameters

机型/ Model	1300光油晶片一体机 / 1300 Varnish Crystal board Laminator
涂胶方式/Laminating	辊涂/ Roller coating
数量/ Quantity	1组/ 1 Set
涂料/ Materials	无影胶, 光油/ Crystal flim,Varnish
打印尺寸/ Print Width	2500mm x 1300mm/8*4ft
速度 / Speed	光油/Varnish 10ms./Min.
(M/Min.)	无影胶贴/PET Crystal Film 3ms./Min.
	密度板、竹木纤维板/MDF, fiberboard 2ms./Min.
介质类型 / Media Type	PVC板/雪弗板/密度板/三聚氰胺板/竹木纤维板等 PVC board, KT board,High density borad, Fiberboard,Melamine board etc.
固化方式/ Curing Method	LED灯紫外线固化/LED ultraviolet curing
机器尺寸/净重 Machine Size/N.W	7m x 2.2 m x 2 m, 2300kgs
包装尺寸/毛重 Packing Size/G.W	3.2 m x 2.5 m x 2.3 m, 2700kgs
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器功耗/ Power Consumption	2.6 KW
环境要求 / Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度:20°C- 30°C,相对湿度:40% - 60% Seperated, clean, low dust, well-ventilated environment Woring Temperature:20°C-30°C Relative humidity:40%-60%

导购指南/Buying Guide

- ➔ 高效率批量生产/ Batch production
- ➔ 机器自动化,人工成本低/ Automatic grade machine, Less labor costs
- ➔ 替代打印光油, 使用成本低/ No Printed Varnish, Less materials cost
- ➔ 光油晶片一体,投入成本低/ All in one, Less investment cost

机器简介

Machine Instruction

- ◆ XYZ三轴均采用直线导轨，承重力大，运行平稳，精度高，使用寿命长
X Y Z axis liner guide rail, Large bearing capacity, smooth running, high precision and long service life
- ◆ 配高精度视觉巡边系统，完美配合UV打印切割，精度高
High precision visual patrol system, perfectly cooperated to cut the uv printing with high precision
- ◆ 兼容各种雕刻软件，操作简单易学
Compatible with various software, easy operation with professional service lifetime



行业应用

Industry Application




Customized Gift



Furniture



Signs



Folding Screen



Showrooming

机器参数

Machine Parameters

机型/ Model	1325R 雕刻机 /1325-R CNC router
工作尺寸/ XYZ axis working area	1300 X 2500 X 200 mm
传动方式/Transmission	XY轴高精度齿条传动/XY axis High precision Rack transmission Z轴丝杆传动/Z axis lead screw transmission
操作速度/ Operation speed	17米/分钟 17 m/min
切割速度 / Engraving speed	8米/分钟 8 m/min
路径定位精度/Path positioning	±0.05mm
主轴转速/Spindle rotatespeed	24000 rpm
设备参数/Component Parameters	
介质类型 / Knife type	雕刻旋转主轴刀/Engraving rotation spindle knife
介质类型/Media type	玻璃/亚克力/木板/PVC板/木塑板等 Glass/Acrylic/Wood/PVC/WPC etc.
介质厚度 /Media Thickness	1110毫米,接受定制/1110mm, higher can be customized
功耗&其他/Power and others	
机器功耗/ Machine power	1.5 KW
主轴功耗/ Spindle power	3.2KW 水冷/3.2 KW Water cooling
可选配置 /Optional configuration	真空吸附平台/Vacuum platform
	除尘装置/Dust collector
	自动巡边系统+相机/Automatic path generation system+Camera
输入电源/ Power	220VAC(±10%)单相,50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ
机器尺寸/净重 Machine Size/N.W	3100 X 2020 X 1800mm, 920kgs
包装尺寸/毛重 Packing Size/G.W	3250*2300*1950mm, 1150kgs

环境要求 / Environment Requirement

工作间环境温度: 0°C - 40°C, 相对湿度: 20% - 80%

Working Temperature: 0°C - 40°C

Relative humidity: 20% - 80%

T600


Heat Press Transfer Digital Printer



T600 Transfer Pigment Ink



Two I3200 Heads



* Dual I3200 Print Heads Speed

360x1800dpi - 4pass	10 m²/h
720x1200dpi - 6pass	7 m²/h
720x1800dpi - 8pass	4 m²/h

2*4720 Heads Printing Machine

Model	T600	
Print Head	Double I3200 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	29.9 in.(760 mm)
	Thickness	Maximum 39 mil(1 mm)
Printing Width	28.7 in.(730 mm)	
Ink Cartridges	Type	Transfer Pigment Ink
	Capacity	Continual Ink Supply System (220ML)
	Color	CMYK+W
Applicable Media	Transfer film	
Color Manage	ICC or density curve	
Media Heating System	Powder & color fixing machine	
Interface	RJ-45/LAN	
RIP Software	RIPrint	
Power Supply	50HZ/60HZ,220V/110V/10A	
Environment	Temperature	10℃ to 38℃
	Humidity	40% to 70%
Printer Dimensions	L1800mm*W1200mm*H1800mm	
Weight	150kg	

Shaking Powder & Color Mix Machine

Model	T600	
Media Width	0-600mm	
Applicable Media	Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc.	
Powder Control	Powder shake control, powder control, powder direction and volume control	
Heating & Drying Function	Multi-stage heating system, drying, cold air fan function	
Rewind Function	Automatic induction winding	
Electrical Parameters	Rated Voltage: 220V	Rated Current: 20A
	Rated Power: 3.42KW	Power Consumption: 1KW-2.5KW
Packing Size & Weight	Machine: 2023*1210*1337mm	Package: 1850* 1310* 1367mm
	G.W: 260kg	N.W: 180kg

Printed Cotton T-Shirts



2*4720 Printing Machine




Printed Film



Pigment Ink



Transfer Film



Shaking Powder Dryer



Heat Press Device




Finished Products




Imported mute guide rail,
low noise and high precision



Stable bulk system ensures
amazing printing speed



High-performance take up
device, suitable for
various media




Carriage anti-collision device,
protect the print head




Simple control switch,
simple operation and
easy to use



Efficient powder shaking
device, powder shaking
is clean



THK high-precision
mute rail



External power supply,
intelligent rolling system

F3200

320 cm/ 10 ft



Technical Data F3200	
Print Technology	
Name	Large format UV printer for Roll Media
Print Size	3.2 m/ 10 ft
Head Model	Ricoh G5/ Toshiba CE4, Automatic heating
Head Qty.	2-8 pcs/ 4-16 pcs
Print Direction	Unidirectional /Bidirectional
Print Head Cleaning	Positive pressure cleaning
Print Speed	Production mode: 30-40 sqm/h Quality mode: 20-25 sqm/h High resolution mode: 10-15 sqm/h
Ink System	
Ink Type	UV ink with RoHS certificate
Ink Color	CMYK+LC+LM+W+V
Ink Cartridge Volume	3 L
Ink Supply	Independent negative pressure ink supply system
Drying Type	UV curing/ Infrared pre-heating, roller-heating and post-heating
White Ink Stirring	Standard configuration
White Ink Circulation	Standard configuration
Media	
Media Type	Wallpaper/ Mural/ Vinyl sheet/banner/ Canvas/ Lightbox/ Leather etc.
Auto Feeding System	Standard configuration
Auto Takeup System	Standard configuration
Media Thickness	≤2 mm
Others	
RIP Software	Ultraprint/ PhotoPrint/ UnitedFancy/ ONYX others
Interface	USB 3.0
Color Control	Comply with ICC standards with curve and density adjustment function
Image Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
Power Supply	AC 220V ±10%, 50HZ/60HZ
Power Consumption	3 KW
Noise	Standby < 32dB Working < 65dB
UV Lamp	LED curing, 50000 hours long lifetime, water colling
Packing Size	4.9*1.2*1.9m
Packing Weight	1800 kg



YC3200

320 cm/ 10 ft



Technical Data YC3200	
Print Technology	
Name	UV Roll to Roll printer for Flex Roll media
Print Size	3.2 m/ 10 ft
Head Model	Ricoh G5, Automatic heating
Head Qty.	2~8 pcs
Print Direction	Unidirectional /Bidirectional
Print Head Cleaning	Positive pressure cleaning
Print Speed	Production mode: 30-40 sqm/h Quality mode: 20-25 sqm/h High resolution mode: 10-15 sqm/h
Ink System	
Ink Type	UV ink, with ROHS certificate
Ink Color	CMYK+LC+LM+W+V
Ink Cartridge Volume	1L
Ink Supply	Independent negative pressure ink supply system
Drying Type	UV curing/ Infrared pre-heating, roller-heating and post-heating
White Ink Stirring	Standard configuration
White Ink Circulation	Standard configuration
Media	
Media Type	Soft film/ Vinyl/ Window Film/ Polyester/ Flex/ Backlit Film, etc
Auto Feeding System	Standard configuration
Auto Takeup System	Standard configuration
Media Thickness	≤50 mm
Others	
RIP Software	Ultraprint/ PhotoPrint/ UnitedFancy/ ONYX others
Interface	USB 3.0
Color Control	Comply with ICC standards with curve and density adjustment function
Image Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
Power Supply	AC 220V ±10%, 50HZ/60HZ
Power Consumption	3 KW
Noise	Standby < 32dB Working < 65dB
UV Lamp	LED curing, 50000 hours long lifetime, water colling
Machine Size	5.45*1.05*1.7 m



Technical Data	A3 series
Print Technology	
Print Format	A3/ 30 x 50 cm
Print Height	10 cm/ 4 in
Head Model	EPSON XP600, 1 ph
Color Set	CMYK+W+W
Control System	HOSON, Best Matching brand for EPSON head
RIP Software	2 in 1, Upgraded by YDM
Print Direction	Uni / Bi-directional
Resolution	8 pass: 720*720 dpi 12 pass: 720*1080 dpi 16 pass: 720*1440 dpi
Print Speed	Production mode: 5-6 sqm/h Quality mode: 3-5 sqm/h (3min/ Table) High resolution mode: 2-3 sqm/h
Machine Highlight	
New Design	Improve Machine Design + Upgrade Supply Chain
Driving Mode	linear rail + Servo Motor + IGUS drag chain
Work Table	Strengthen Glass
Ink System	Continuous Ink supply
Curing System	Imported LED lamp, 30000 hours lifespan, Water cooling Chiller
Head Cleaning	Automatic by Program
Height Detection	Infrared Detector
Others	
Print Media	Glass, Ceramic, Acrylic, Metal, Leather, Plastic, Wood, PVC ... etc
PC Configuration	Win7/ Win10, 64 bit, CPU≥ i5, RAM ≥8GB, Space for Disk C≥100G
Signal Transmission	Optical Fiber + USB 3.0
Color Control	Comply with ICC standards, with curve and density adjustment function
File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
Power Supply	AC220V,50/ 60HZ
Working Power	50 W
Noise	Standby < 32 dB ; Working < 65 dB
Machine Size	0.65 m x 0.8 m x 0.44 m
Net Weight	65 KG

Technical Data	A4 series
Print Technology	
Print Format	A4/ 20 x 30 cm
Print Height	6 cm/ 2 in
Head Model	EPSON XP600, 1 ph
Color Set	CMYK+W+W
Control System	HOSON, Best Matching brand for EPSON head
RIP Software	2 in 1, Upgraded by YDM
Print Direction	Uni / Bi-directional
Resolution	8 pass: 720*720 dpi 12 pass: 720*1080 dpi 16 pass: 720*1440 dpi
Print Speed	Production mode: 5-6 sqm/h Quality mode: 3-5 sqm/h (90s/ Table) High resolution mode: 2-3 sqm/h
Machine Highlight	
New Design	Improve Machine Design + Upgrade Supply Chain
Driving Mode	linear rail + Servo Motor + IGUS drag chain
Work Table	Anodized Aluminum
Ink System	Continuous Ink supply, Ink-Lack Warning
Curing System	Imported LED lamp, 30000 hours lifespan, Water cooling Chiller
Head Cleaning	Automatic by Program
Height Detection	Infrared Detector
Others	
Print Media	Glass, Ceramic, Acrylic, Metal, Leather, Plastic, Wood, PVC ... etc
PC Configuration	Win7/ Win10, 64 bit, CPU≥ i5, RAM ≥8GB, Space for Disk C≥100G
Signal Transmission	Optical Fiber + USB 3.0
Color Control	Comply with ICC standards, With curve and density Adjustment function
File Format	TIFF/ JPEG/ POSTSCRIPT3/ PDF
Power Supply	AC220V,50/ 60HZ
Working Power	50 W
Noise	Standby < 32 dB ; Working < 65 dB
Machine Size	0.71 m * 0.51 m * 0.37 m
Net Weight	49 KG



*Thanks for our lovely customers' feedback
that enable us present this amazing
UV printing show !*



*High-end printing
Start with YDM*



GLASS



Church Glass Window



Glass art wall



Decoration of shop glass window



Shower room glass



Indoor glass partition



Glass furnitures

CERAMIC TILE



An Italy restaurant



Ceramic coasters



Pool Villa in Thailand



Luxury hotel in Korea



New Zealand customer made ceramic art photo



India religion totem

ACRYLIC



Wedding gift



Activity souvenir



Decoration Picture



White Ink Direct print



Enterprise culture wall



Photography art Exhibition

METAL



Metal Decoration Painting



Customized Card Holder



ACP Advertising Sign



Metal Award



Cigarette Holder



Employee Signage

LEATHER



Fashion Products



High-end commercial advertising



Strong embossed effect



Glossy varnish effect



Stretch test for UV soft ink



Leather product piece

WOOD & PLYWOOD & BAMBOO



High-end Commercial Display



Wedding Souvenir



Postcard



Wooden Products



Commercial Advertising



Decoration Art Pictures

ROLL MEDIA



Classic wall Mural



Bank corner Decoration



Brand Communication



Laminating Decoration



Flags



Car Stickers

EDIBLES



Cookies



Customized Cake full of love



Macaron Wishes



Coffee printing effect



Company Meeting Dessert



Creative Namecard

SIGN & ADVERTISING



Customized Trophy



Outdoor sign



Outdoor large format Display



Information Table



Commercial Advertising



Marketing Activities

DECORATION & CONSTRUCTION MATERIAL



High-end Customized curtain




Chinese Vintage Background Wall



Customized Furniture



WPC board Background Wall

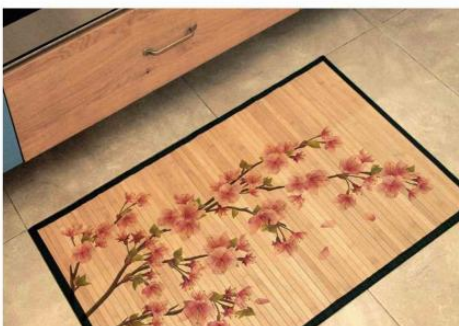

Wood floor mat



Bamboo sleeping mat

WALLPAPER & MURAL



Photography Studio Background



Live streaming Room



Meetingroom wall Decoration



Restaurant Wall Mural



Business area Wallpaper



Wall clother Decoration

CEILING & BACKLIT



Luxury brand Counter



Swimming pool Roofing



Airpot Commercial Advertising



Subway lightbox



Hotel high-end ceiling



Decoration soft film backlit

CUSTOM & DIY



Customized wine



Magic cube



Gift items



Enhance brand value



Luggage



Customized Digital Products